




Retro-reflective sensor

OFP-FPKG/US-100

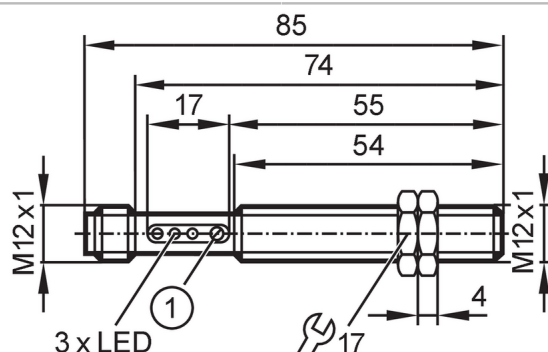

1 potentiometer



Product characteristics

Type of light	red light
Housing	Threaded type

Application

Special feature	polarization filter; Function check output
Function principle	Retro-reflective sensor
Application	Industrial applications

Electrical data

Operating voltage	[V]	10...36 DC
Current consumption	[mA]	< 35
Protection class		II
Reverse polarity protection		yes
Type of light		red light
Wave length	[nm]	660

Outputs

Electrical design		PNP
Output function		light-on/dark-on mode; (programmable)
Max. voltage drop switching output DC	[V]	2.5
Function check output		yes
Max. voltage drop of function check output	[V]	3.5
Max. current load for function check output	[mA]	10
Permanent current rating of switching output DC	[mA]	200
Switching frequency DC	[Hz]	320
Short-circuit protection		yes
Type of short-circuit protection		yes (non-latching)
Overload protection		yes



Retro-reflective sensor

OFP-FPKG/US-100

Monitoring range		
Range referred to prismatic reflector	[m]	0.2...0.8; (Prismatic reflector Ø 80 E20005)
Range adjustable		yes
Max. light spot diameter	[mm]	70
Light spot dimensions refer to		at maximum range
Polarization filter available		yes
Operating conditions		
Ambient temperature	[°C]	-25...60
Protection		IP 65
Tests / approvals		
EMC	EN 60947-5-2	
	EN 55011	class B
MTTF	[years]	615
UL approval	Ta	< 40 °C
	Enclosure type	Type 1
	voltage supply	Limited Voltage/Current
	UL approval number	E030
	File number UL	E174191
Mechanical data		
Weight	[g]	40.3
Housing		Threaded type
Dimensions	[mm]	M12 x 1 / L = 74
Thread designation		M12 x 1
Material		housing: brass white bronze coated
Lens material		front lens:PMMA
Displays / operating elements		
Display	Switching status	1 x LED, yellow
	Power	1 x LED, green
	Function	1 x LED, red
Accessories		
Items supplied		lock nuts: 2
		screwdrivers
Remarks		
Pack quantity		1 pcs.
Electrical connection		
Connector: 1 x M12; coding: A; Contacts: 4		

OF5025



Retro-reflective sensor

OFP-FPKG/US-100

Connection



2 Function check output

Diagrams and graphs

excess gain graph

