
O6S305

Through-beam sensor transmitter

O6S-OOKG/AS/4P

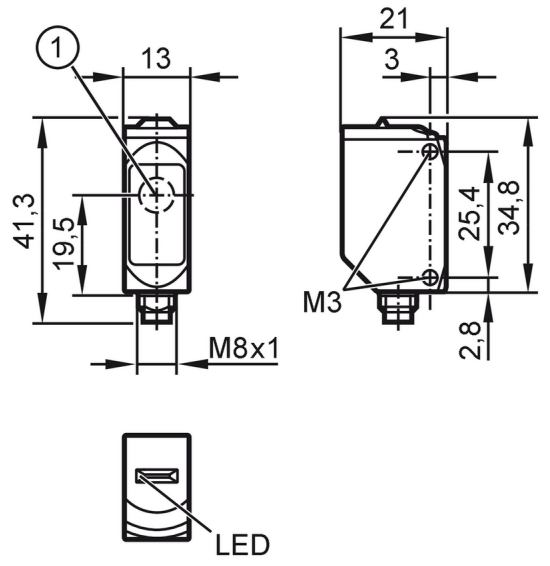

1: light emission

Product characteristics			
Type of light			red light
Housing			rectangular
Application			
Function principle			Through-beam sensor
Application			food and beverage industry
Electrical data			
Operating voltage	[V]		10...30 DC
Current consumption	[mA]		11; ((24 V))
Protection class			III
Type of light			red light
Wave length	[nm]		633
Detection zone			
Transmitter / receiver			transmitter
Range	[m]		< 10
Max. light spot diameter	[mm]		300
Light spot dimensions refer to			at maximum range
Interfaces			
Communication interface			IO-Link
Transmission type			COM2 (38,4 kBaud)
IO-Link revision			1.1
SDCI standard			IEC 61131-9
Profiles		Smart Sensor - SSP 0	Generic Profiled Sensor
		Function	Device identification
SIO mode			yes
Required master port type			A

O6S305


Through-beam sensor transmitter

O6S-OOKG/AS/4P

Min. process cycle time	[ms]	2.5	
IO-Link process data (cyclical)		**function**	**bit length**
		process value	8
IO-Link functions (acyclical)		application specific tag; operating hours counter; switching cycles counter	
Supported DeviceIDs		**Type of operation**	**DeviceID**
		default	420
Operating conditions			
Ambient temperature	[°C]	-25...80	
Protection		IP 65; IP 67; IP 68; IP 69K	
Tests / approvals			
EMC		EN 60947-5-2	
MTTF	[years]	1239	
UL approval		Ta	-25...40 °C
		Enclosure type	Type 1
		voltage supply	Class 2
		UL approval no.	E011
Mechanical data			
Weight	[g]	33.8	
Housing		rectangular	
Dimensions	[mm]	34.8 x 13 x 21	
Materials		housing: stainless steel (316L/1.4404); Sealing: EPDM; plastics: PPSU	
Lens material		front pane:PMMA	
Lens alignment		side lens	
Tightening torque	[Nm]	1; (screws)	
Displays / operating elements			
Display		operation	1 x LED, green
Remarks			
Remarks		operating voltage "supply class 2" according to cULus	
Pack quantity		1 pcs.	

Electrical connection

Connector: 1 x M8; coding: A; Contacts: 4




O6S305

Through-beam sensor transmitter

O6S-OOKG/AS/4P


Connection

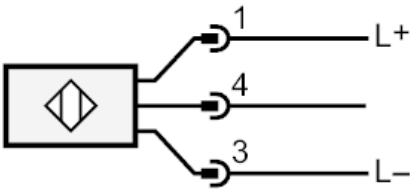

4	IO-Link

Diagrams and graphs

excess gain graph

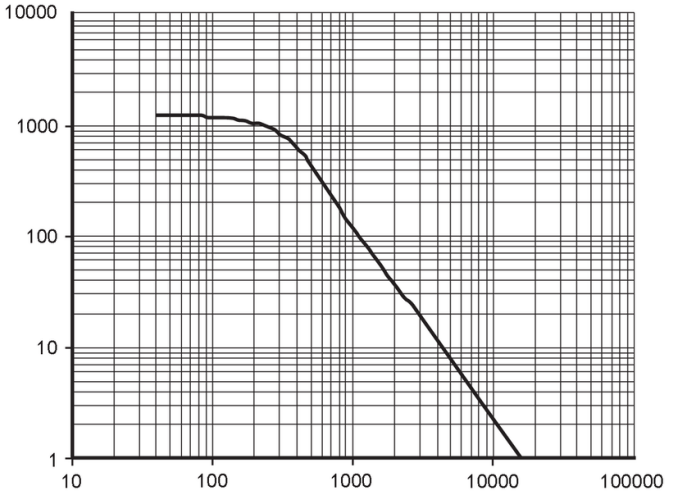

x: distance [mm]

y: excess gain factor