
AC2750

AS-Interface PCB module

PCB 4DI 4DO T W A/B

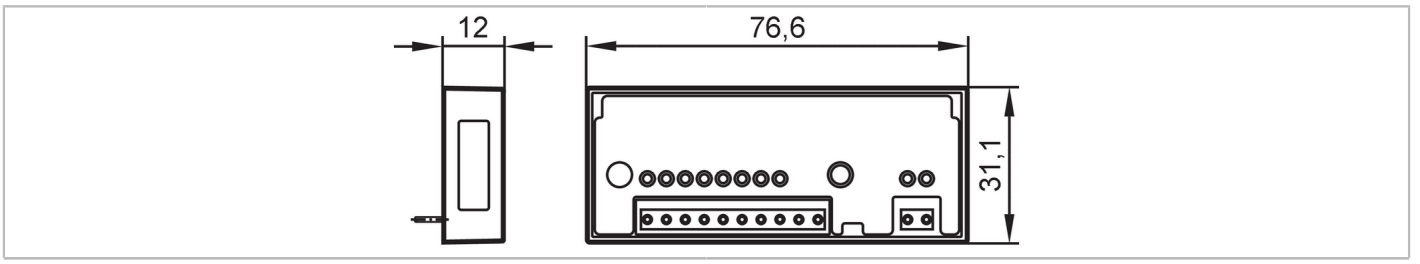

Application		
Design		only for operation with AS-i masters with the profile M4
Application		For integration of mechanical switches into AS-i networks
Electrical data		
Operating voltage	[V]	18...31.6 DC
Max. current consumption from AS-i	[mA]	180; (without sensors: < 30 mA; inputs and outputs active: < 180 mA)
Protection class		III
Max. current load total	[A]	0.15; (total current for all inputs and outputs supplied from AS-i: 150 mA)
Integrated watchdog		yes
Inputs / outputs		
Number of inputs and outputs		Number of digital inputs: 4; Number of digital outputs: 4
Inputs		
Number of digital inputs		4
Input circuit of digital inputs		PNP
Sensor supply of the inputs		AS-i
Voltage supply	[V]	18...30; (DC)
Max. total current rating of inputs	[mA]	150
Input current High	[mA]	6...10
Input current Low	[mA]	0...2
Switching level high	[V]	> 11
Digital inputs protected against short circuits		yes
Outputs		
Electrical design		PNP
Number of digital outputs		4
Circuit		PNP
Voltage range DC	[V]	18...30; (DC)
Max. current load per output	[mA]	100; (utilisation category DC-13 (control of electromagnets): 2,5 W (IEC 60947-5-1))
Total current rating of all outputs	[A]	0.15
Short-circuit proof		yes
Electrically separated		yes
Actuator supply outputs		AS-i

AC2750

AS-Interface PCB module

PCB 4DI 4DO T W A/B

Operating conditions			
Ambient temperature	[°C]	-25...55	
Protection		depending on the housing	
Tests / approvals			
EMC		EN 50295	
AS-i classification			
AS-i version		3.0	
Extended addressing mode		yes	
AS-i master profile		M4	
AS-i profile		S-7.A.7	
AS-i I/O configuration	[hex]	7	
AS-i ID code	[hex]	A.7	
AS-i certificate		102301	
Mechanical data			
Weight	[g]	75.5	
Housing		rectangular	
Type of mounting		installation in a surface-mounted housing	
Dimensions	[mm]	76.3 x 31.1 x 12	
Materials		housing: PC potted	
Displays / operating elements			
Display		operation	LED, green
		errors	LED, red
		function	LED, yellow
Remarks			
Remarks		A watchdog function switches the outputs off if there is no communication on the AS-i line.	
		Install the unit so that exposed parts cannot be touched.	
		Installation in a surface-mounted housing with the dimensions of 68 x 136 x 53 mm (LxWxH), e.g. Schneider Electric Harmony, XALD03, XALD04	
		Do not connect any of the following points to an external potential:	
		0-, I+, I1, I2, I3, I4	
		The connections are electrically connected with the AS-i cable.	
		can be used up to a height of 2000 metres above sea level	
Pack quantity		1 pcs.	

Electrical connection

Cable: 0.2 m, PVC

I1 WH	switching input sensor 1
I2 WH	switching input sensor 2
I3 WH	switching input sensor 3
I4 WH	switching input sensor 4
O1 YE	switching output actuator 1
O2 YE	switching output actuator 2
O3 YE	switching output actuator 3
O4 YE	switching output actuator 4
0- BK	sensor and actuator supply 0 V
I+ RD	sensor and actuator supply 24 V
AS-i - (FLT) BU	AS-i -
AS-i + (PWR) BN	AS-i +