
O6S215

Through-beam sensor transmitter

O6SIOOKG/AS/4P

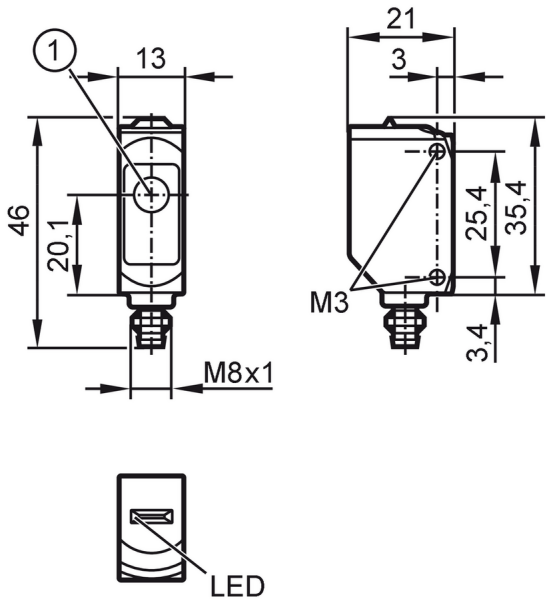

1: light emission

Product characteristics		
Type of light		infrared light
Housing		rectangular
Application		
Function principle		Through-beam sensor
Application		Industrial applications / factory automation
Electrical data		
Operating voltage	[V]	10...30 DC
Current consumption	[mA]	11; ((24 V))
Protection class		III
Type of light		infrared light
Wave length	[nm]	850
Detection zone		
Transmitter / receiver		transmitter
Range	[m]	< 15
Max. light spot diameter	[mm]	460
Light spot dimensions refer to		at maximum range
Operating conditions		
Ambient temperature	[°C]	-25...60
Protection		IP 65; IP 67
Tests / approvals		
EMC		EN 60947-5-2
MTTF	[years]	2920

O6S215

Through-beam sensor transmitter

O6SIOOKG/AS/4P

UL approval		Ta	-25...40 °C
		Enclosure type	Type 1
		voltage supply	Class 2
		UL approval no.	E002


Mechanical data		
Weight	[g]	17.7
Housing		rectangular
Dimensions	[mm]	35.4 x 13 x 21
Materials		housing: ABS orange; upper part of the housing: PPSU black
Lens material		front pane:PMMA
Lens alignment		side lens
Sealing material		EPDM
Tightening torque	[Nm]	0.5

Displays / operating elements		
Display	operation	1 x LED, green


Remarks	
Remarks	operating voltage "supply class 2" according to cULus
Pack quantity	1 pcs.

Electrical connection

Connector: 1 x M8; coding: A; Contacts: 4; Locking: metal, coated; Sealing: EPDM



Connection

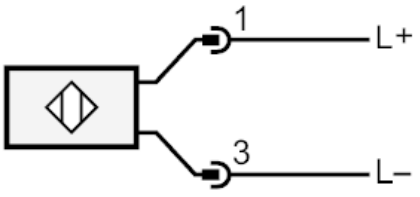

O6S215

Through-beam sensor transmitter

O6SIOOKG/AS/4P

Diagrams and graphs

excess gain graph

