


Inductive sensor

IGC2008SFRKG/10M

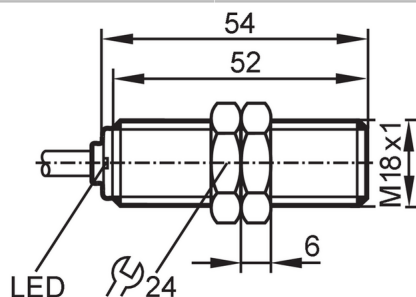

Product characteristics

Electrical design		PNP/NPN
Output function		normally open / normally closed; (selectable)
Sensing range	[mm]	8
Housing		threaded type
Dimensions	[mm]	M18 x 1 / L = 54

Electrical data

Operating voltage	[V]	10...36 DC
Current consumption	[mA]	15; (24 V)
Protection class		II
Reverse polarity protection		yes

Inputs

Clock input		f _{max} = 1000 Hz; t _v < 0.5 ms; I _{max} < 0.8 mA (36 V)
-------------	--	---

Outputs

Electrical design		PNP/NPN
Output function		normally open / normally closed; (selectable)
Max. voltage drop switching output DC	[V]	2.5
Permanent current rating of switching output DC	[mA]	125
Switching frequency DC	[Hz]	300
Short-circuit protection		yes
Type of short-circuit protection		pulsed
Overload protection		yes

Detection zone

Sensing range	[mm]	8
Real sensing range S _r	[mm]	8 ± 10 %
Operating distance	[mm]	0...6.48

Accuracy / deviations

Correction factor		steel: 1 / stainless steel: 0.7 / brass: 0.5 / aluminium: 0.4 / copper: 0.3
Hysteresis	[% of S _r]	1...15
Switch point drift	[% of S _r]	-10...10

IG6213



Inductive sensor

IGC2008SFRKG/10M

Operating conditions		
Ambient temperature	[°C]	-25...80
Protection		IP 67
Tests / approvals		
EMC	EN 60947-5-2	
Mechanical data		
Weight	[g]	319.3
Housing		threaded type
Mounting		non-flush mountable
Dimensions	[mm]	M18 x 1 / L = 54
Thread designation		M18 x 1
Materials		housing: PBT; end cap: TPE
Displays / operating elements		
Display	switching status	1 x LED, yellow
Accessories		
Items supplied		lock nuts: 2
Remarks		
Remarks		minimum cable bending radius
		fixed installation: 5 x external diameter
		flexing installation: 15 x external diameter
Pack quantity		1 pcs.


Inductive sensor

IGC2008SFRKG/10M

Electrical connection

Cable: 10 m, PVC; 3 x 0.5 mm²

Connection

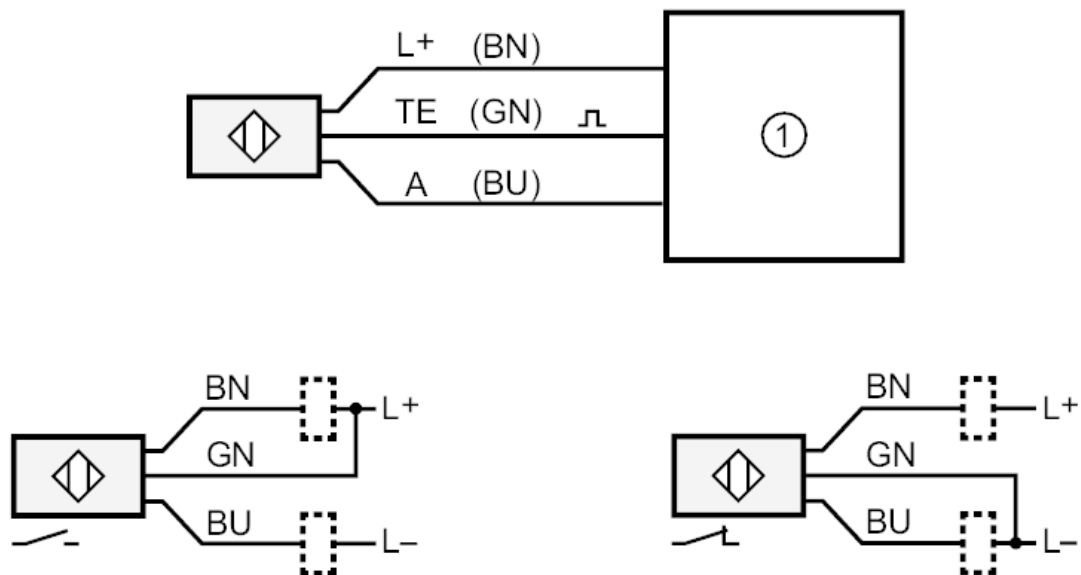

1: control monitor or PLC
A: Output
TE: Clock input
normally closed when TE = L- or open; normally open when TE = L+
Core colours :
BN = brown
BU = blue
GN = green




Inductive sensor

IGC2008SFRKG/10M

Diagrams and graphs

Clock input

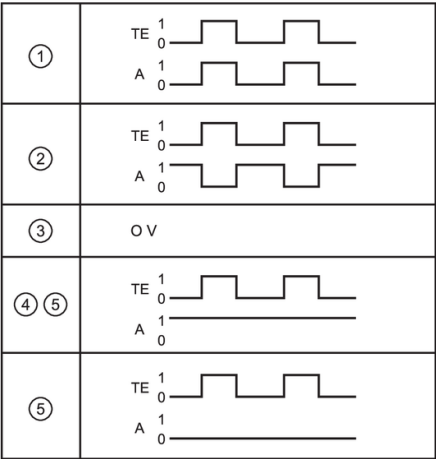

- 1: sensor undamped
- 2: sensor damped
- 3: wire break
- 4: short circuit
- 5: faulty output stage
- A: Output
- TE: Clock input