
AC3220

AS-Interface control cabinet module

SmartL25 4DI 4DO R C

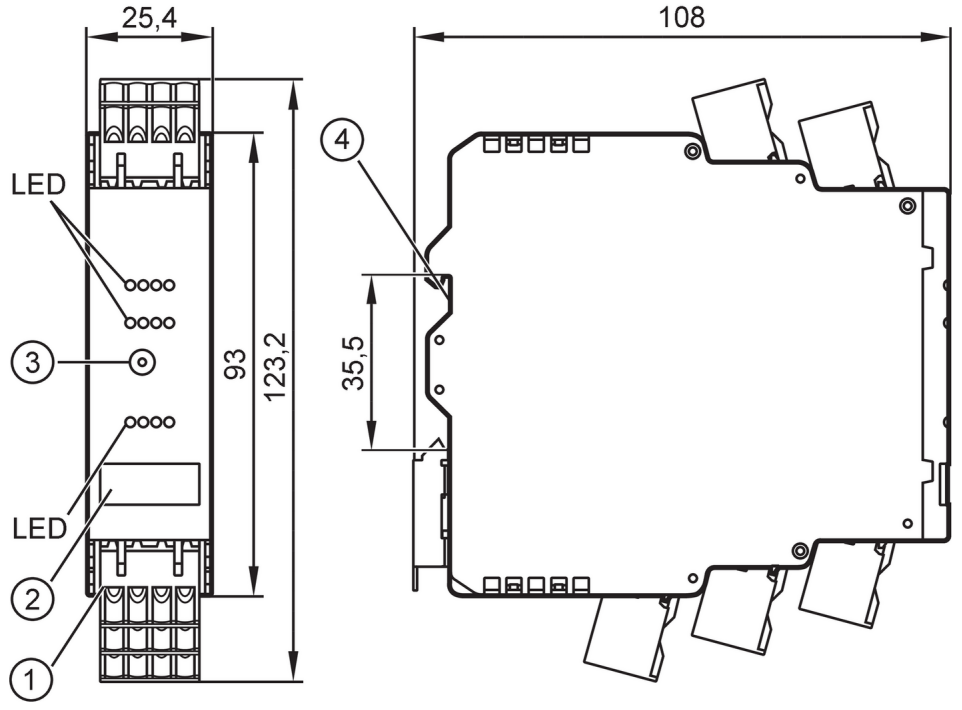

1 plug with cage clamp connection
2 panel for labelling
3 addressing socket
4 mounting on DIN rail

Application		
Design		housing for DIN rail mounting, only for operation with AS-i masters with the profile M4
Application		Installation in control cabinets
Electrical data		
Operating voltage	[V]	26.5...31.6 DC
Max. current consumption from AS-i	[mA]	300
Integrated watchdog		yes
Inputs / outputs		
Number of inputs and outputs		Number of digital inputs: 4; Number of relay outputs: 4
Inputs		
Number of digital inputs		4
Input circuit of digital inputs		PNP; (type 2 according to IEC 61131-2)
Sensor supply of the inputs		AS-i
Voltage supply	[V]	18...30; (DC)
Max. total current rating of inputs	[mA]	200
Input current High	[mA]	6...10
Input current Low	[mA]	0...2
Switching level high	[V]	> 11
Digital inputs protected against short circuits		yes

AC3220

AS-Interface control cabinet module

SmartL25 4DI 4DO R C

Outputs						
Voltage range DC	[V]	24; (The outputs O1 + O3 and O2 + O4 must be supplied in pairs with the same voltage. 2 x 24 V DC)				
Voltage range AC	[V]	10...240; (The outputs O1 + O3 and O2 + O4 must be supplied in pairs with the same voltage. 2 x 240 V AC)				
Max. current load per output	[mA]	6000; (ohmic resistance)				
Total current rating of all outputs	[A]	24; (ohmic resistance)				
Overall current rating for outputs (UL)	[A]	6; (ohmic resistance)				
Number of relay outputs		4				
Contact rating		6 A; (max. 240 V AC / 24 V DC see diagram:: Contact rating normally open (NO): B300: 6000 cycles)				
Short-circuit proof		no				
Electrically separated		yes				
Operating conditions						
Ambient temperature	[°C]	-25...65				
Note on ambient temperature		the derating of the current load indicated in the operating instructions is to be taken into account at the following ambient temperature: > 55 °C				
Storage temperature	[°C]	-25...75				
Max. relative air humidity	[%]	90; (non condensing)				
Max. height above sea level	[m]	2000				
Protection		IP 20				
Protection rating terminals		IP 20				
Pollution degree		2				
Tests / approvals						
EMC		EN 62026-2				
		EN 61000-6-2				
		EN 61000-6-3				
MTTF	[years]	295				
AS-i classification						
AS-i version		3.0				
AS-i addressing		addressing socket				
Extended addressing mode		yes				
AS-i master profile		M4				
AS-i profile		S-7.A.7				
AS-i I/O configuration	[hex]	7				
AS-i ID code	[hex]	A.7				
AS-i ID1 code	[hex]	7; (fixed)				
AS-i certificate		124301				
Assignment of the data bits		data bit	D0	D1	D2	D3
		input	I-1	I-2	I-3	I-4
		Output	O-1	O-2	O-3	O-4
Mechanical data						
Weight	[g]	216.05				
Housing		rectangular				

AC3220

AS-Interface control cabinet module

SmartL25 4DI 4DO R C

Type of mounting		mounting on DIN rail; (TH35 (EN 60715))	
Dimensions	[mm]	123.2 x 25.4 x 108	
Materials		plastics; PC-GF20	
Displays / operating elements			
Display		switching status	LED, yellow I1...I4, O1...O4
		operation	LED, green AS-i
		errors	LED, red
Accessories			
Items supplied		cage clamps	
Remarks			
Remarks		Do not connect any of the following points to an external potential:	
		I-, I+, I1, I2, I3, I4	
		The connections are electrically connected with the AS-i cable.	
Pack quantity		1 pcs.	

AC3220


AS-Interface control cabinet module

SmartL25 4DI 4DO R C

Electrical connection

pin headers: 4 x ; Spacing: 5.0 mm

Connection

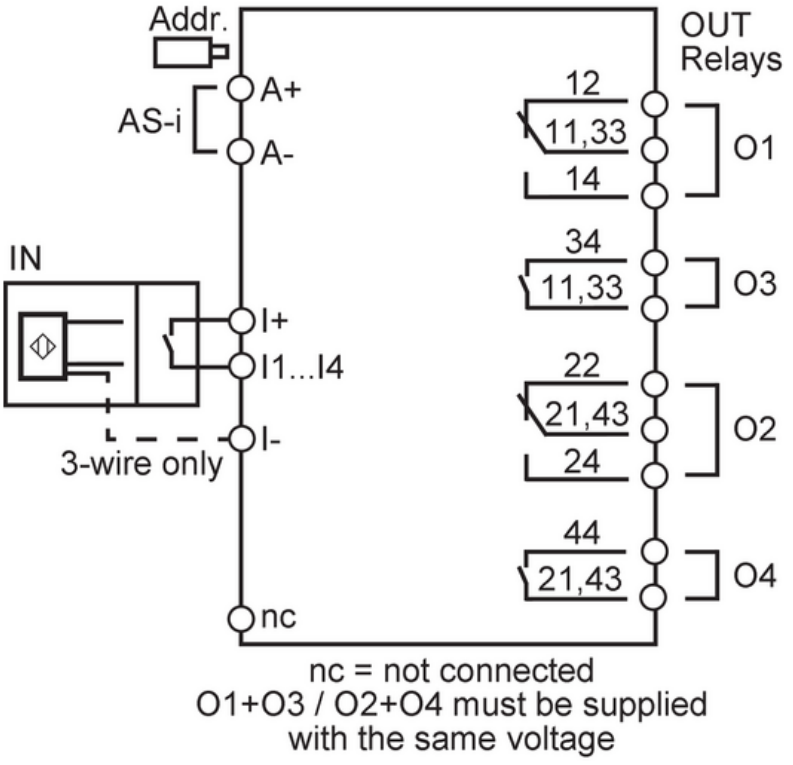

A+	AS-i +
A-	AS-i -
I+	Sensor supply +24V
I-	Sensor supply 0V
I1...I4	switching input sensor 1...4
O1...O4	switching output relay 1...4
11	relay O1 changeover contact, common
12	relay O1 changeover contact, normally closed contact
14	relay O1 changeover contact, normally open
21	relay O2 changeover contact, common
22	relay O2 changeover contact, normally closed contact
24	relay O2 changeover contact, normally open
33, 34	relay O3 normally open
43, 44	relay O4 normally open
nc	not used


AC3220

AS-Interface control cabinet module

SmartL25 4DI 4DO R C

Diagrams and graphs

Contact rating

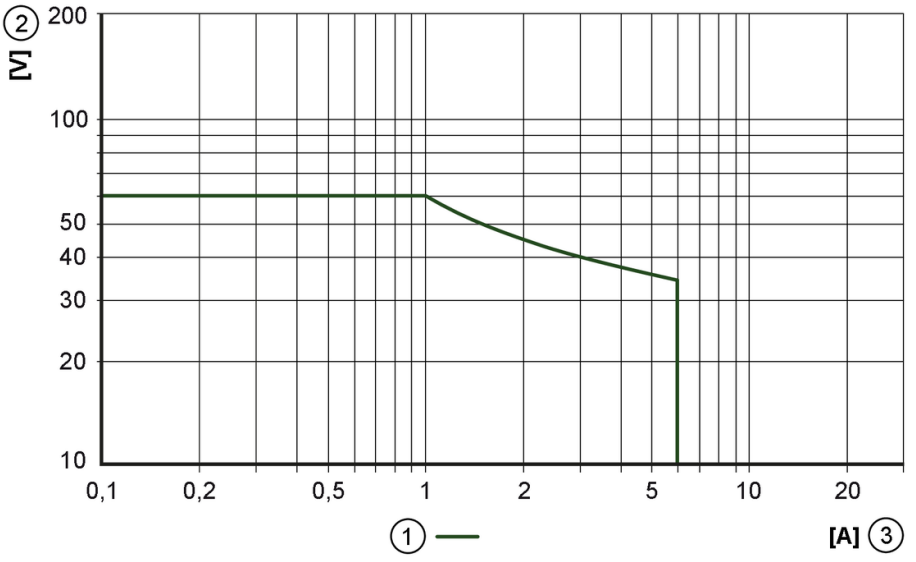

1 ohmic resistance

2 Voltage [DC]

3 Current [DC]