


O5D150

Laser distance sensor

O5DLCPKG/US

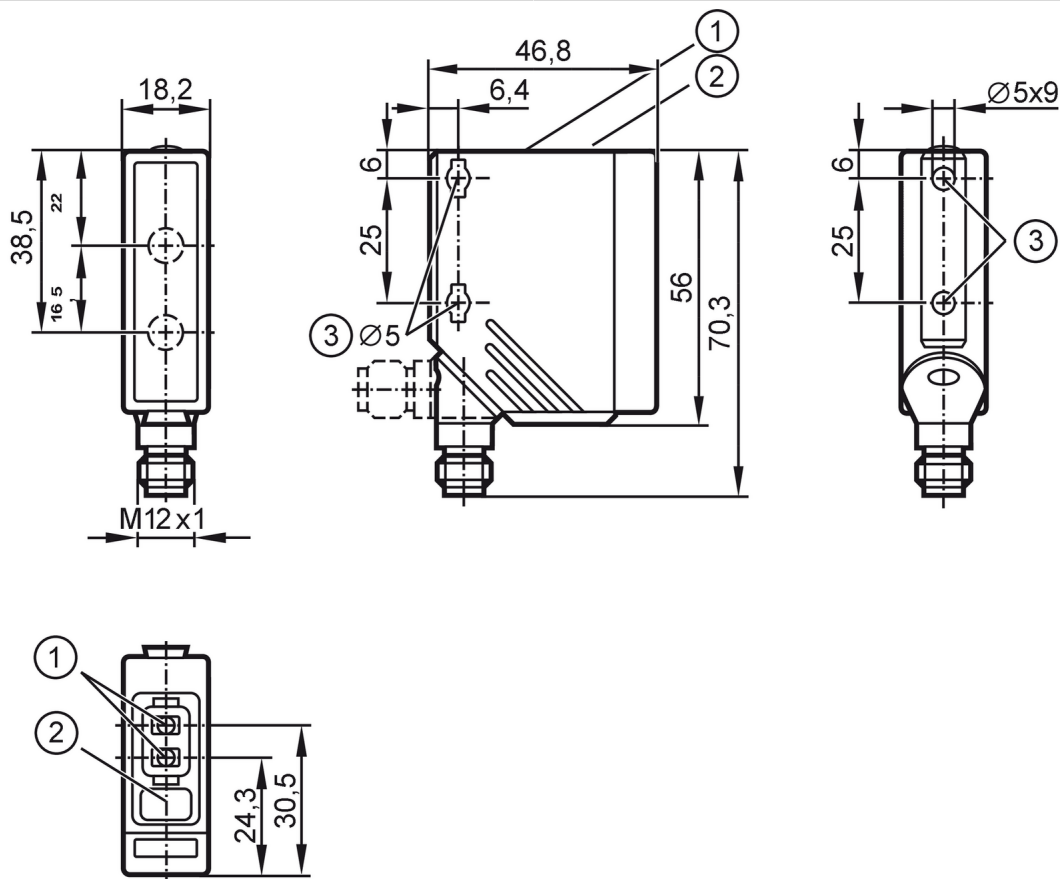

- 1: setting pushbuttons
2: alphanumeric display 3-digit
3: Tightening torque < 2 Nm when using a mounting screw M5
--- Receiver in upper lens
transmitter in lower lens



Product characteristics

Type of light	red light
Laser protection class	1
Housing	rectangular

Application

Special feature	Background suppression
Application	Industrial applications

Electrical data

Operating voltage	[V]	10...30 DC; (cULus - Class 2 source required)
Current consumption	[mA]	75; (24 V)
Protection class		III
Reverse polarity protection		yes
Type of light		red light
Wave length	[nm]	650
Typ. lifetime	[h]	50000

O5D150



Laser distance sensor

O5DLCPKG/US

Inputs / outputs			
Number of inputs and outputs		Number of digital outputs: 2	
Outputs			
Total number of outputs		2	
Electrical design		PNP	
Number of digital outputs		2	
Output function		normally open / closed; (complementary)	
Max. current load per output [mA]		100	
Switching frequency DC [Hz]		11	
Short-circuit protection		yes	
Type of short-circuit protection		yes (non-latching)	
Overload protection		yes	
Monitoring range			
Max. light spot diameter [mm]		5	
Light spot dimensions refer to		2 m	
Detection range hysteresis [%]		< 4	
Note on monitoring range hysteresis		black 6 % remission	
Background suppression available		yes	
Background suppression [m]		< 20	
Measuring/setting range			
Measuring range [m]		0.03...2	
Sampling rate [Hz]		33	
Interfaces			
Communication interface		IO-Link	
Transmission type		COM2 (38,4 kBaud)	
IO-Link revision		1.1	
SDCI standard		IEC 61131-9	
Profiles		Smart Sensor - SSP 0	Generic Profiled Sensor
		Function	Multiple switching signal
		Function	Process data variable
SIO mode		yes	
Process data analog		1	
Process data binary		1	
Min. process cycle time [ms]		6.4	
Supported DeviceIDs		Type of operation	DeviceID
		default	372
Operating conditions			
Ambient temperature [°C]		-25...60	
Note on ambient temperature		at ta < -10 °C warm-up is necessary, laser is off	
Protection		IP 65; IP 67	
Max. immunity to extraneous light [klx]		10; (on the object)	

O5D150



Laser distance sensor

O5DLCPKG/US

Tests / approvals		
EMC	EN 60947-5-2	
Vibration resistance	DIN EN 60068-2-6	10 g (10...55 Hz) / 120 min. per axis (x, y, z)
Shock resistance	DIN EN 60068-2-27	50 g 6 shocks / 11 ms half-sine (x, y, z)
Laser protection class		1
Notes on laser protection	Caution:	Laser light
	laser class:	1
		EN / IEC60825-1:2007
		EN / IEC60825-1:2014
		Complies with 21 CFR 1040.10 except for conformance with IEC 60825-1 Ed. 3, as described in Laser Notice No. 56, dated May 8, 2019.
MTTF	[years]	151
Mechanical data		
Weight	[g]	61
Housing		rectangular
Dimensions	[mm]	56 x 18.2 x 46.8
Material		housing: PA; Front framework: stainless steel; operator interface: TPU (urethane); lens: PMMA
Lens alignment		Side sensing
Displays / operating elements		
Display	Switching status	LED, yellow Switching output PIN 4
	Power	LED, green
	Display	alphanumeric display, 3-digit
Display unit		cm
Remarks		
Pack quantity		1 pcs.
Electrical connection		
Connector: 1 x M12; coding: A; Contacts: 4		


O5D150



Laser distance sensor

O5DLCPKG/US

Connection

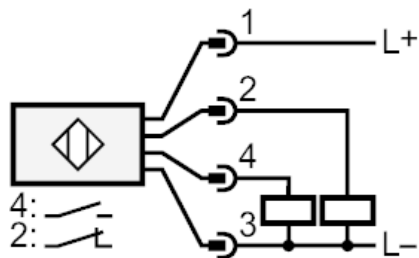

4: OUT / IO-Link

Other data


Accuracy

	Accuracy			
distance	black (6 % remission)	white (90 % remission)		
0 mm	± 25 mm	± 25 mm		
500 mm	± 25 mm	± 25 mm		
1000 mm	± 25 mm	± 25 mm		
1500 mm	± 40 mm	± 30 mm		
2000 mm	± 50 mm	± 30 mm		

Extraneous light on the object < 10 klx

Diagrams and graphs

Hysteresis graph

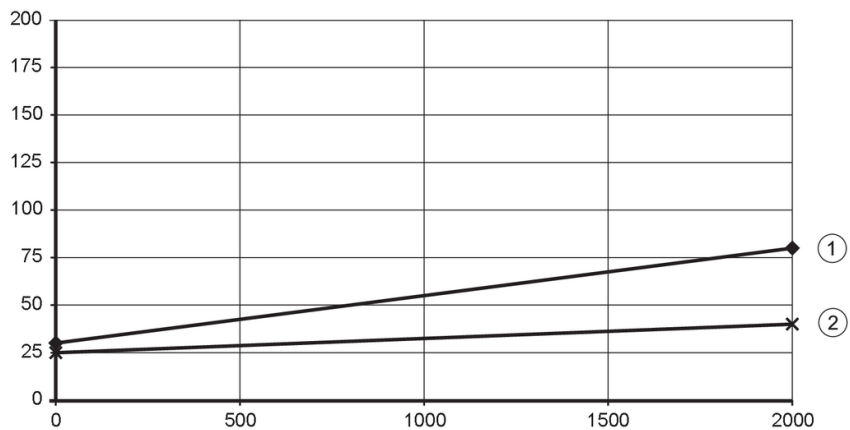

x: distance [mm]
y: Hysteresis [mm]
1 = background black 6 % remission
2 = background white 90 % remission