
SN0152

Control monitor for flow sensors

VS3000/85...265VAC

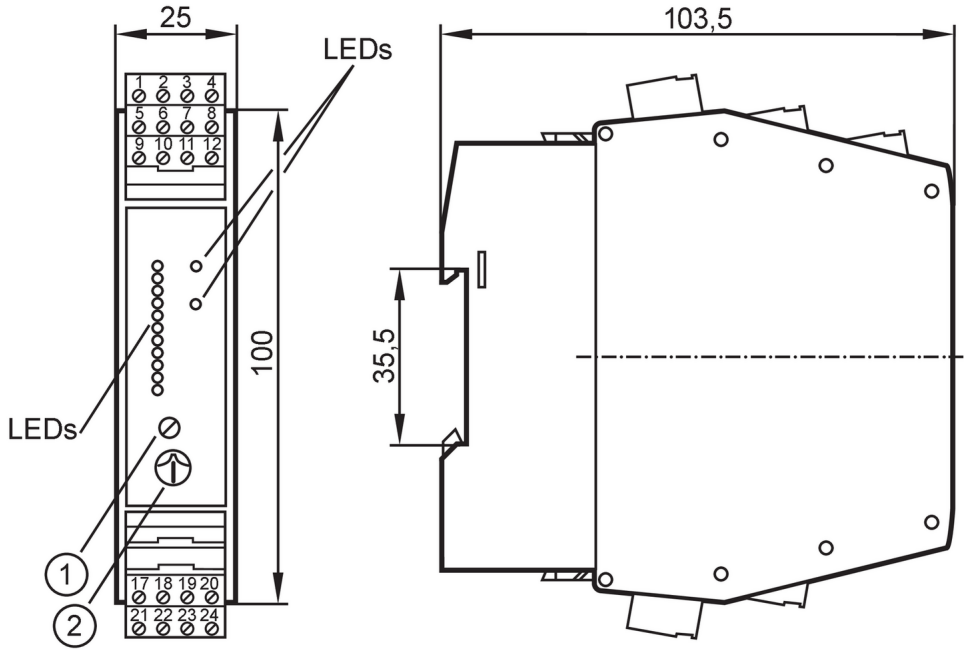

1 potentiometer (switch point flow)
2 potentiometer (switch point temperature)

Application		
Application		Flow monitoring; Temperature monitoring; Wire monitoring
Electrical data		
Frequency AC	[Hz]	47...63
Operating voltage tolerance	[%]	-5...10
Operating voltage	[V]	90...240 AC
Max. power consumption	[VA]	4
Protection class		II
Reverse polarity protection		no
Power-on delay time	[s]	10...80; (adjustable (fixed-value resistors terminals 22-23))
Number of channels		1
Outputs		
Performance in case of a fault		In case of undervoltage all relays are de-energised; the LED "LOW VOLTAGE/WIRE BREAK-RELAY" lights
Electrical design		relay
Contact rating		4 A (250 V AC / 30 V DC)
Switching function flow monitoring		relay energised when flow is present and during the power-on delay time
Switching function temperature monitoring		relay de-energised when temperature is exceeded
Switching function wire break monitoring		relay de-energised in case of wire break or short circuit
Short-circuit proof		no
Overload protection		no

SN0152

Control monitor for flow sensors

VS3000/85...265VAC

Response times			
Response time	[s]	< 3	
Software / programming			
Adjustment of the switch point		potentiometer	
Selection liquids / gases		wire bridge; on delivery: monitoring of liquids.; for monitoring of gases: link terminals 23 / 24.	
Switch point setting		potentiometer	
Temperature range	[°C]	40...120	
Repeatability of the set switch point	[K]	4	
Operating conditions			
Ambient temperature	[°C]	-20...60	
Note on ambient temperature		in case of sufficient free space for convection cooling	
Protection		IP 20	
Tests / approvals			
MTTF	[years]	168	
Mechanical data			
Weight	[g]	248	
Housing		rectangular	
Type of mounting		mounting on DIN rail; (TH35 (EN 60715))	
Dimensions	[mm]	100 x 25 x 103.5	
Materials		housing: PBT	
Displays / operating elements			
Display		function	11 x LED
		switching status	LED, red
		switching status	LED, red
Electrical connection			
Required protection		miniature fuse to IEC60127-2 sheet 1; ≤ 5 A; fast acting	
Remarks			
Remarks		Recommendation Check the safe functioning of the unit after a short circuit.	
Pack quantity		1 pcs.	

SN0152


Control monitor for flow sensors

VS3000/85...265VAC

Electrical connection

COMBICON connector:

Connection

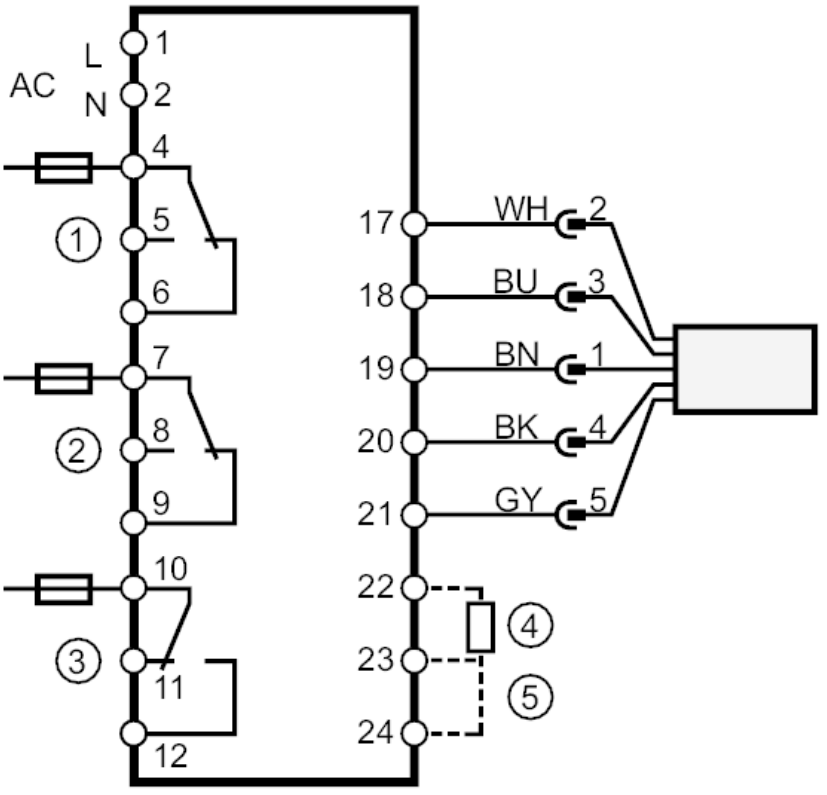

1 =	Flow monitoring
2 =	Wire monitoring
3 =	Temperature monitoring
4 =	Power-on delay time
5 =	selection liquid/gas
Note	miniature fuse to IEC60127-2 sheet 1 ≤ 5 A fast acting
	Core colours :
BN =	brown
BU =	blue
BK =	black
WH =	white
GY =	grey