
E80391

RFID antenna adapter to increase the ranges

ANT-AMP/136x76/KQ

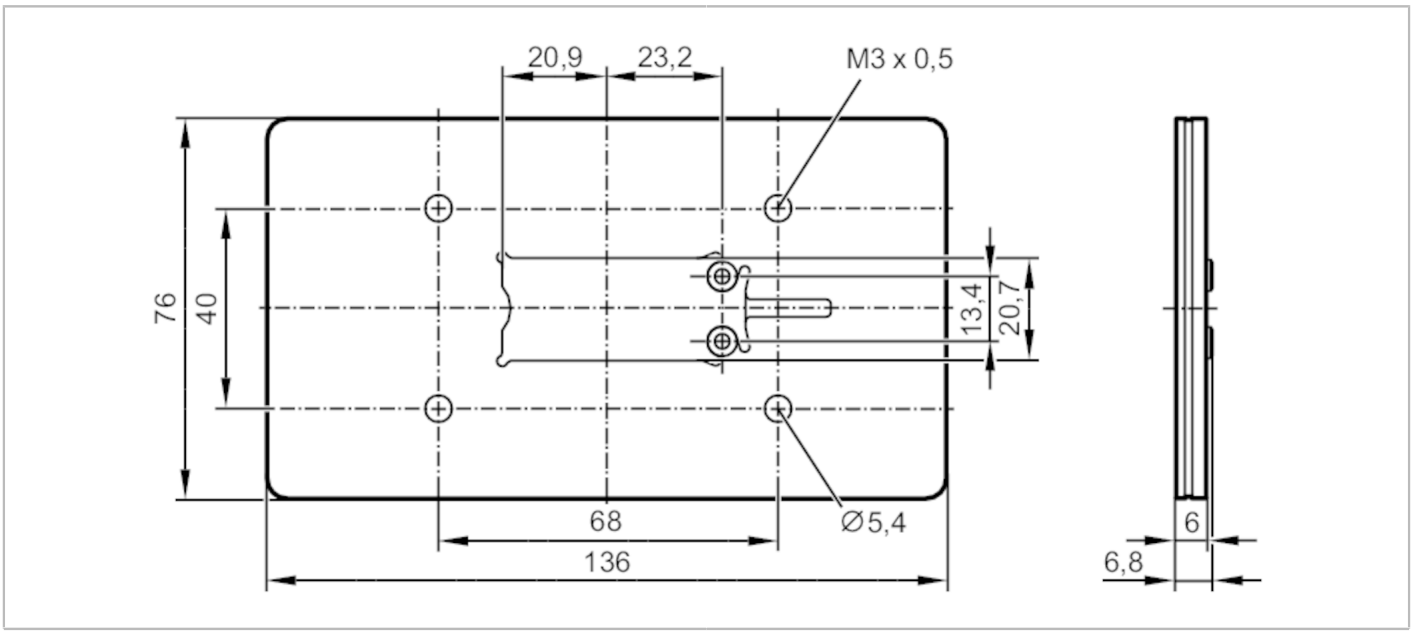

Electrical data		
Operating frequency	[MHz]	13,56
Operating conditions		
Ambient temperature	[°C]	-20...60
Storage temperature	[°C]	-20...60
Tests / approvals		
MTTF	[years]	25944
Mechanical data		
Weight	[g]	110
Materials		PVC
Tightening torque	[Nm]	0.5
Remarks		
Pack quantity		1 pcs.
Other data		

Tag E80371 (30 mm)

antenna	range without metal			
ANT515 / ANT516 + E80391	40 mm			

Tag E80384 (50 mm)

antenna	range without metal			
ANT515 / ANT516 + E80391	70 mm			

E80391

RFID antenna adapter to increase the ranges

ANT-AMP/136x76/KQ

Tag E80320 (ISO card)

antenna	range without metal			
ANT515 / ANT516 + E80391	80 mm			