
AC5216

AS-Interface ClassicLine module with quick mounting technology

ClassicLine 4AI C AUX IP67

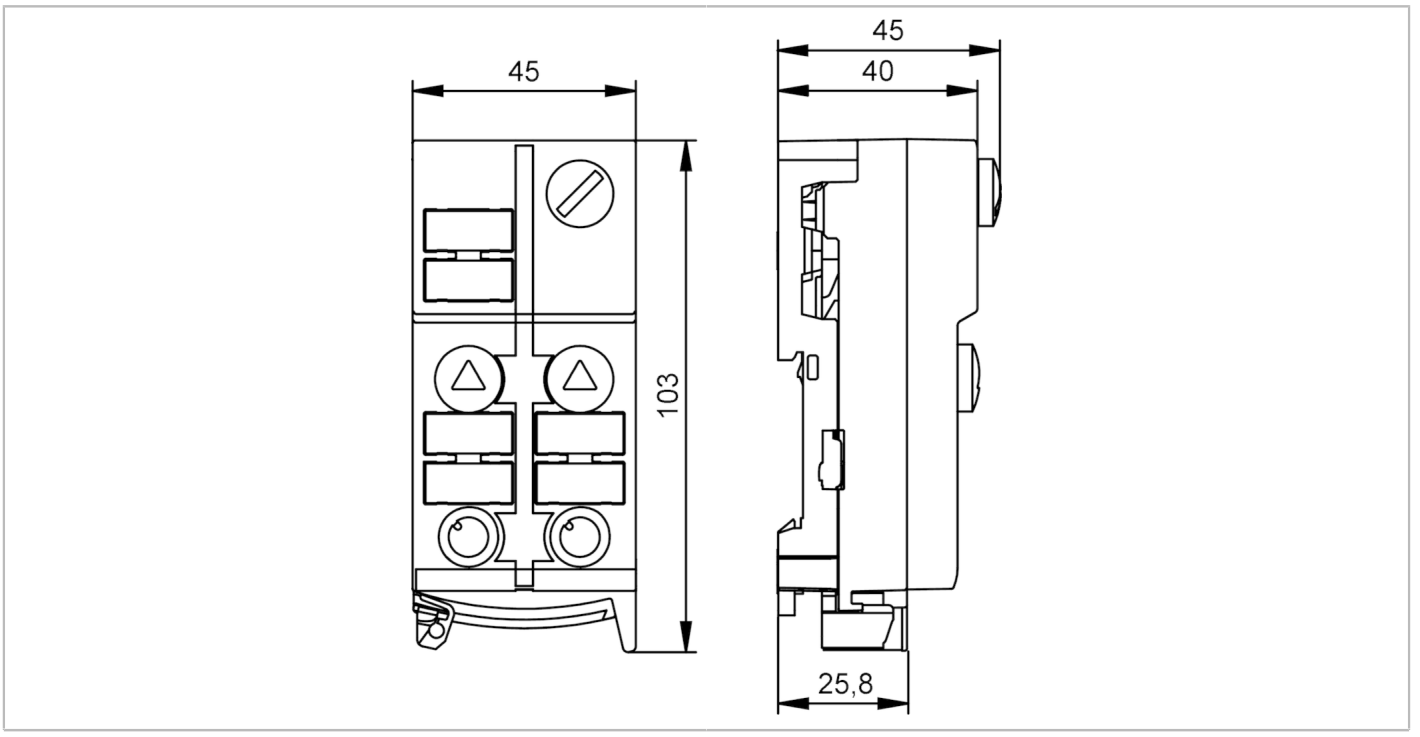

Product characteristics		
Number of inputs and outputs		Number of analogue inputs: 4
Application		
Design		housing for DIN rail mounting
Application		field installation
Electrical data		
Operating voltage	[V]	18...31.6 DC
Max. current consumption from AS-i	[mA]	50
Reverse polarity protection		yes
Max. current load total	[A]	2
Additional voltage supply	[V]	16...30 DC; (AUX)
Max. current consumption from additional supply	[mA]	2000
Inputs / outputs		
Number of inputs and outputs		Number of analogue inputs: 4
Inputs		
Sensor supply of the inputs		AUX
Number of analogue inputs		4; (connection of 2- and 3-wire sensors)
Analogue input (current)	[mA]	4...20
Max. voltage drop across load for nominal voltage	[V]	10
Short-circuit proof		yes
Resolution		12 bit

AC5216

AS-Interface ClassicLine module with quick mounting technology

ClassicLine 4AI C AUX IP67

Accuracy / deviations			
Accuracy		0.5; (% of the final value of the measuring range; tolerance under the influence of electromagnetic interference: < ± 1 % of the final value of the measuring range)	
Operating conditions			
Ambient temperature	[°C]	-25...70	
Storage temperature	[°C]	-25...70	
Max. relative air humidity	[%]	90; (non condensing)	
Max. height above sea level	[m]	2000	
Protection		IP 67	
Tests / approvals			
EMC		EN 50295	
		EN 61000-6-2	
		EN 61000-6-3	
MTTF	[years]	105	
UL approval		voltage supply	Class 2
AS-i classification			
AS-i version		2.11; 3.0	
Extended addressing mode		no	
AS-i master profile		M3; M4	
AS-i profile		S-7.3.E	
AS-i I/O configuration	[hex]	7	
AS-i ID code	[hex]	3.E	
AS-i certificate		123501	
Mechanical data			
Weight	[g]	154.3	
Housing		rectangular	
Type of mounting		mounting on DIN rail; (TH35 (EN 60715))	
Dimensions	[mm]	103 x 45 x 44.7	
Materials		PA; piercing contacts: CuSn6 nickel-plated and tin-plated	
Displays / operating elements			
Display		analogue signal	LED, yellow channels AI1...AI4
		operation	LED, green AS-i, AUX
		errors	LED, red
Electrical connection			
Module connection		Flat cables	
Accessories			
Items supplied		lower part	
Accessories (optional)		Protective cap: M12, E73004	
Remarks			
Remarks		There is an electrical separation between AS-i and AUX and between AS-i and the analogue inputs.	
		The actuator supply on pins 1 and 3 can be used to supply the sensors.	
Pack quantity		1 pcs.	

AC5216

AS-Interface ClassicLine module with quick mounting technology

ClassicLine 4AI C AUX IP67

Electrical connection

quick mounting technology for AS-i flat cable: ; three orientations possible

Connector: M12; coding: A; Contacts: 4



1	Sensor supply +24V
2	analogue input AI +
3	Sensor supply 0V / analogue input AI-
4	not used (n.c.)
5	functional earth