
OBF502

Fibre-optic amplifier

OBF-FAKG/T

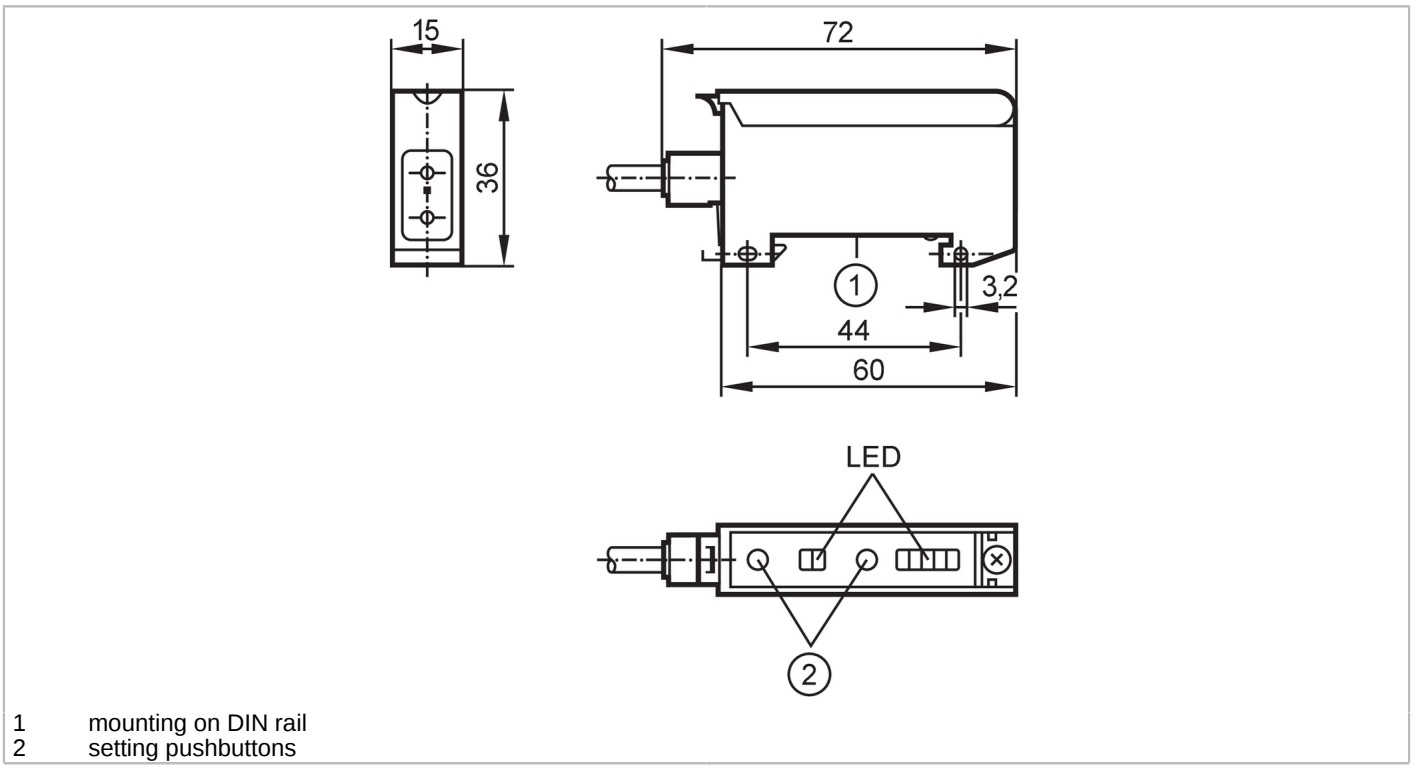

1 mounting on DIN rail
2 setting pushbuttons

Product characteristics		
Type of light		red light
Housing		rectangular
Application		
Special feature		Function check output
Design		Fibre-optic amplifiers for acrylic fibre optics
Application		High switching frequency for fast processes
Electrical data		
Operating voltage	[V]	10...30 DC
Current consumption	[mA]	< 50
Protection class		III
Reverse polarity protection		yes
Type of light		red light
Wave length	[nm]	630
Outputs		
Electrical design		PNP/NPN; (automatic load detection PNP/NPN)
Output function		light-on/dark-on mode; (programmable)
Max. voltage drop switching output DC	[V]	2.5
Function check output		yes
Max. voltage drop of function check output	[V]	2.5
Max. current load for function check output	[mA]	10

OBF502

Fibre-optic amplifier

OBF-FAKG/T

Permanent current rating of switching output DC	[mA]	100	
Switching frequency DC	[Hz]	3000	
Short-circuit protection		yes	
Type of short-circuit protection		pulsed	
Overload protection		yes	
Time function	[s]	0.001...0.09	
Detection zone			
Range	[m]	0...2; (Through-beam sensor)	
Range	[mm]	0...100; (Diffuse reflection sensor)	
Range adjustable		yes	
Operating conditions			
Ambient temperature	[°C]	-25...60	
Protection		IP 65	
Tests / approvals			
EMC		EN 60947-5-2	
MTTF	[years]	806	
Mechanical data			
Weight	[g]	136.5	
Housing		rectangular	
Type of mounting		mounting on DIN rail; (TH35 (EN 60715))	
Dimensions	[mm]	36 x 15 x 60	
Number of channels		1	
Materials		housing: PPE modified	
Displays / operating elements			
Display		switching status	1 x LED, yellow
		operation	1 x LED, green
		unsafe zone	1 x LED, red
		excess gain	4 x LED, green
Remarks			
Remarks		light-on mode corresponds to the NC output function for through-beam fibre optics	
		corresponds to the NO output function for diffuse-reflection fibre optics	
		dark-on mode corresponds to the NO output function for through-beam fibre optics	
		corresponds to the NC output function for diffuse-reflection fibre optics	
		operating voltage "supply class 2" according to cULus	
Pack quantity		1 pcs.	

OBF502


Fibre-optic amplifier


OBF-FAKG/T

Electrical connection

Cable: 2 m, PVC; 4 x 0.34 mm²

Connection

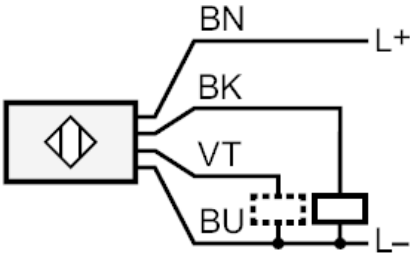


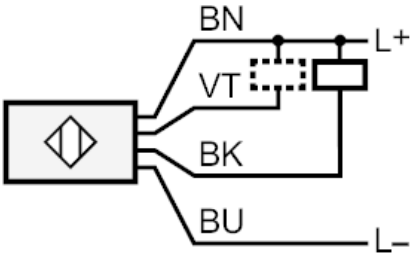

lilac	Function check output
	Core colours :
BK =	black
BN =	brown
BU =	blue
VT =	lilac

Diagrams and graphs

excess gain graph

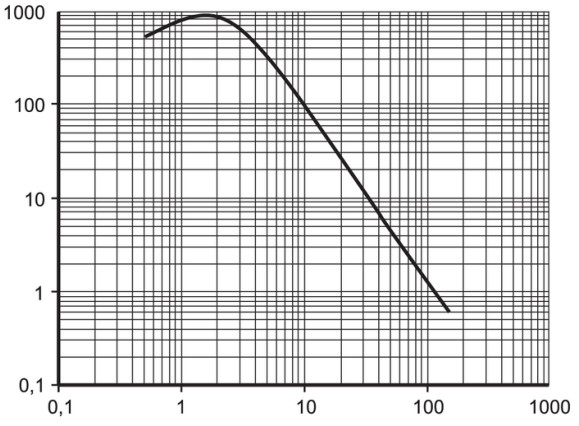

x: Abstand [mm]

y: Funktionsreservefaktor