


AL2341



IO-Link input module

IO-Link Module 10x2 DI M12 IP67

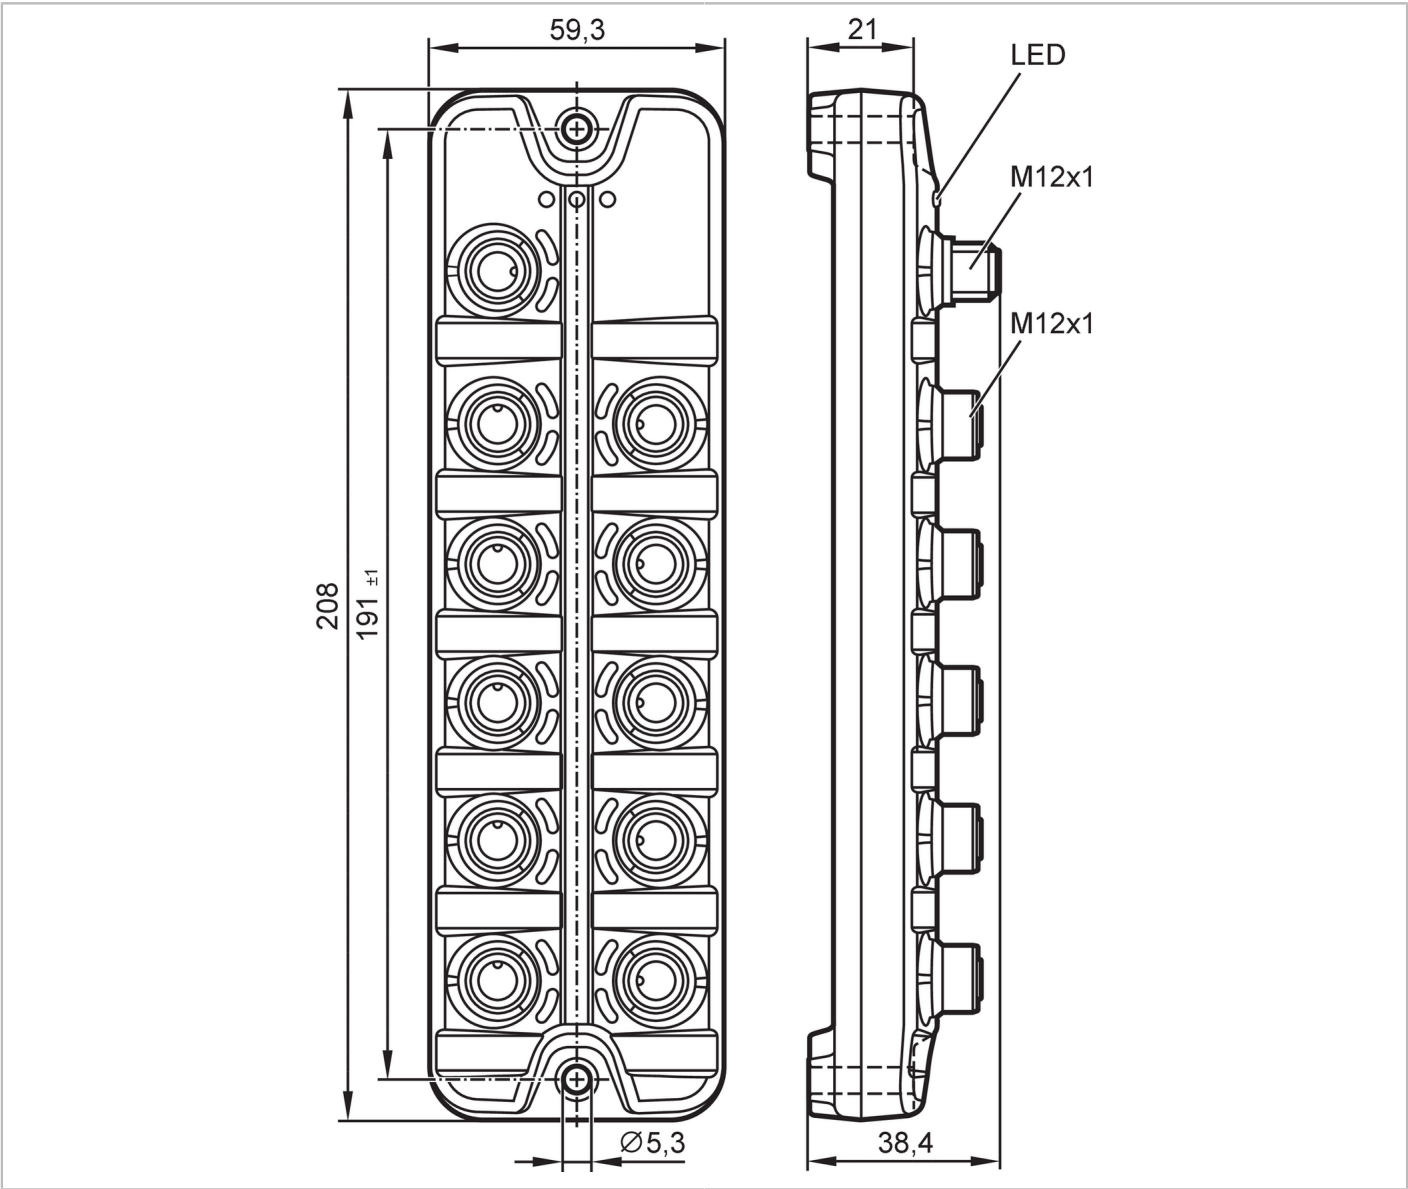

IO-Link



Electrical data

Operating voltage	[V]	18...30 DC
Current consumption	[mA]	100...1100; (US)
Protection class		III

Sensor supply US

Current rating per port	[A]	0.1
-------------------------	-----	-----

Inputs / outputs

Number of inputs and outputs	Number of digital inputs: 20
------------------------------	------------------------------

Inputs

Number of digital inputs	20; (10 x 2 PNP type 2 according to IEC 61131-2)
Sensor supply of the inputs	IO-Link
Voltage supply	[V] 16...30



IO-Link input module

IO-Link Module 10x2 DI M12 IP67

Interfaces		
Communication interface	IO-Link	
Transmission type	COM2 (38,4 kBaud)	
IO-Link revision	1.1	
SDCI standard	IEC 61131-9	
Profiles	Smart Sensor - SSP 0	Generic Profiled Sensor
	Function	Device identification
	Function	Process data variable
	Function	Device diagnosis
SIO mode	no	
Required master port class	A	
Min. process cycle time	[ms]	4.3
Supported DeviceIDs	Type of operation	DeviceID
	default	940
Operating conditions		
Ambient temperature	[°C]	-25...60
Storage temperature	[°C]	-25...70
Max. relative air humidity	[%]	90
Max. height above sea level	[m]	2000
Protection	IP 65; IP 67	
Protection rating (NEMA 250)	6P	
Chemical media	ISO 16750-5	AA, BA, BD, HLP, CC, DB, DC, DD, CA
	NEMA 250 5.13.1	AA
Tests / approvals		
EMC	EN 61000-6-2	
	EN 61000-6-4	
	IEC 61131-9	
Shock resistance	DIN EN 60068-2-27	
Vibration resistance	DIN EN 60068-2-64	
	DIN EN 60068-2-6	
MTTF	[years]	140
Mechanical data		
Weight	[g]	392.5
Housing	rectangular	
Type of mounting	Backplane mounting	
Dimensions	[mm]	208 x 59.3 x 38.4
Material	housing: PA orange; Socket: brass nickel-plated	
Displays / operating elements		
Display	Power	1 x LED, green
	fault	1 x LED, red
	Function	1 x LED, yellow
Accessories		
Accessories (optional)	protective cap for M12 sockets	
Remarks		
Pack quantity	1 pcs.	

AL2341



IO-Link input module

IO-Link Module 10x2 DI M12 IP67

Electrical connection - IO-Link


Connector: 1 x M12; coding: A; Contacts: 4



X1	
1	+ 24 V DC (US)
2	not used
3	GND (US)
4	IO-Link

Electrical connection - Inputs

Connector: 10 x M12; coding: A; Contacts: 4



X1.0...X1.9	
1	Sensor supply + 24 V DC (US)
2	Digital input DI2
3	Sensor supply GND (US)
4	Digital input DI1
5	not used