
LW2120

Continuous level sensor

NON-CONTACT LEVEL TRANSMITTER

An IO-Link master and a parameter setting software (e.g. moneo or LR DEVICE) are required for initial set-up.
For high process temperatures: The temperature at the process connection is decisive. The actual medium temperature may be higher.
use according to FDA compliance only in conjunction with a hygienic adapter

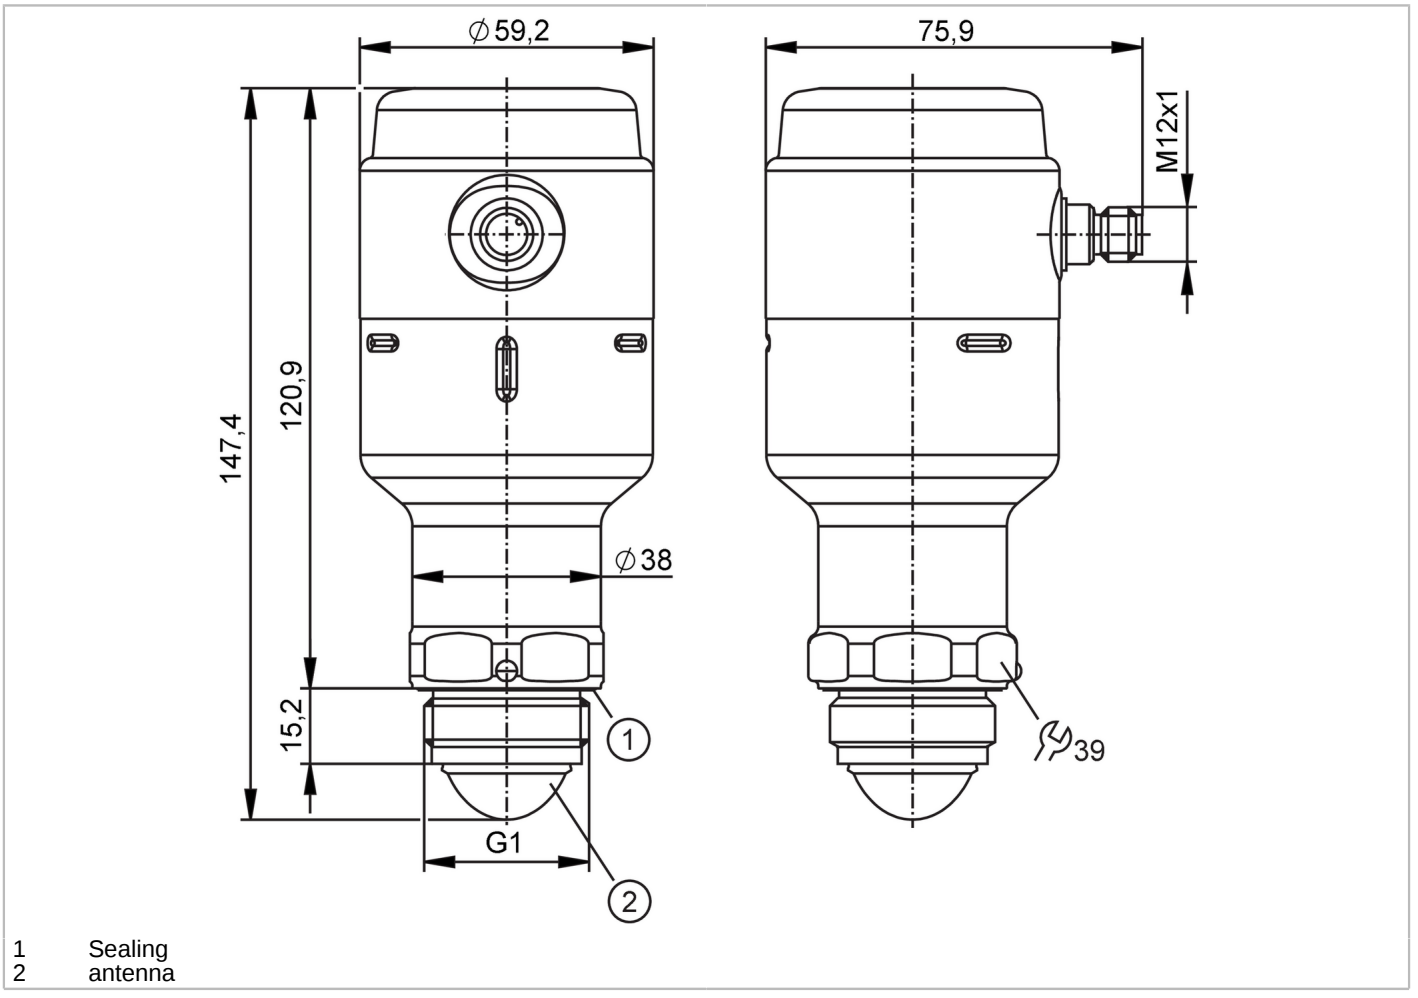

1 Sealing
2 antenna

Product characteristics		
Number of inputs and outputs		Number of digital outputs: 1; Number of analogue outputs: 1
Process connection		G 1 Aseptoflex Vario
Application		
Special feature		Gold-plated contacts
Dielectric constant of the medium		≥ 2
Recommended media		water; hydrous media
Process temperature	[°C]	-40...150; (see diagram and note under remarks)
Maximum speed of the change of level	[mm/s]	200
Pressure rating	[bar]	8
Note on pressure rating		0 bar at medium temperature < - 20 C
Vacuum resistance	[mbar]	-1000

LW2120

Continuous level sensor

NON-CONTACT LEVEL TRANSMITTER

MAWP for applications according to CRN	[bar]	8
Radio approval for		EU/RED; Great Britain; South Korea; USA; Canada; Australia; New Zealand; Vietnam; Singapore; Argentina; Brazil; Japan; Taiwan; South Africa; Mexico
Note on radio approval		The list of countries applying the European Radio Equipment Directive 2014/53/EU (RED) can be found under “Downloads”.
Electrical data		
Operating voltage	[V]	18...30 DC
Current consumption	[mA]	< 80
Protection class		III
Reverse polarity protection		yes
Power-on delay time	[s]	< 15
Measuring principle		FMCW (80 GHz technology); frequency range 77 - 81 GHz
Inputs / outputs		
Number of inputs and outputs		Number of digital outputs: 1; Number of analogue outputs: 1
Outputs		
Total number of outputs		2
Output signal		switching signal; analogue signal; IO-Link
Electrical design		PNP/NPN
Number of digital outputs		1; (2 parameterisable)
Output function		normally open / normally closed; (parameterisable)
Max. voltage drop switching output DC	[V]	2.5
Permanent current rating of switching output DC	[mA]	50
Number of analogue outputs		1
Analogue current output	[mA]	4...20, invertible; (scalable)
Max. load	[Ω]	43,5 * (Ub – 18) + 600 Ω
Short-circuit protection		yes
Type of short-circuit protection		pulsed
Overload protection		yes
Measuring/setting range		
Measuring range	[m]	10; (see diagram:)
Sampling rate	[Hz]	> 3
Accuracy / deviations		
Accuracy		± 2 mm
Resolution	[mm]	1
Zero signal (current)	[mA]	3.8
Full signal (current)	[mA]	20.5
Temperature drift per 10 K		± 1 mm
Response times		
Response time	[ms]	330
Interfaces		
Communication interface		IO-Link

LW2120

Continuous level sensor

NON-CONTACT LEVEL TRANSMITTER

Transmission type		COM2 (38,4 kBaud)	
IO-Link revision		1.1	
SDCI standard		IEC 61131-9	
Profiles		Smart Sensor - SSP 3.1	Measuring Sensor
		Common - I&D	Identification and Diagnosis
		Function	Multiple switching signal
SIO mode		yes	
Required master port type		A	
Process data analogue		1	
Process data binary		2	
Min. process cycle time	[ms]	6	
Supported DeviceIDs		**Type of operation**	**DeviceID**
		default	1611

Operating conditions

Ambient temperature	[°C]	-40...80
Note on ambient temperature		see diagram:
Storage temperature	[°C]	-40...90
Protection		IP 68; IP 69K

Tests / approvals

EMC		DIN EN 61326-1	group 1: Class A (IO-Link active); B (IO-Link not active, with analogue and switching outputs)
Shock resistance		DIN EN 60068-2-27	50 g (11 ms) / 20 g (6 ms)
Vibration resistance		IEC 61298-3	2 g (10...1000 Hz)
MTTF	[years]	330	

Mechanical data


Weight	[g]	723.8
Materials		stainless steel (316L/1.4404); PA; FKM; FVMQ
Materials (wetted parts)		PTFE; EPDM; FVMQ when used without Aseptoflex Vario adapter
Process connection		G 1 Aseptoflex Vario
Surface characteristics Ra/Rz of the wetted parts		Ra < 0.76 µm

Remarks

Notes	An IO-Link master and a parameter setting software (e.g. moneo or LR DEVICE) are required for initial set-up.; For high process temperatures: The temperature at the process connection is decisive. The actual medium temperature may be higher.; use according to FDA compliance only in conjunction with a hygienic adapter
Pack quantity	1 pcs.

Electrical connection

Connector: 1 x M12; coding: A; Contacts: 4, gold-plated




LW2120

Continuous level sensor

NON-CONTACT LEVEL TRANSMITTER

Connection

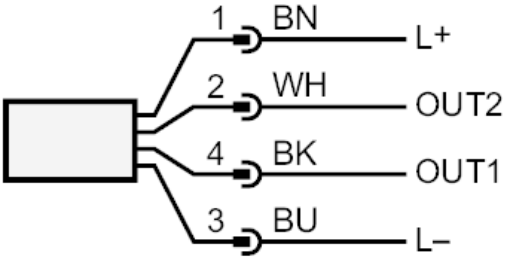

OUT1:	switching output IO-Link
OUT2:	switching output analogue output
	colours to DIN EN 60947-5-2
	Core colours :
BK =	black
BN =	brown
BU =	blue
WH =	white


LW2120

Continuous level sensor

NON-CONTACT LEVEL TRANSMITTER

Diagrams and graphs

Angle of radiation

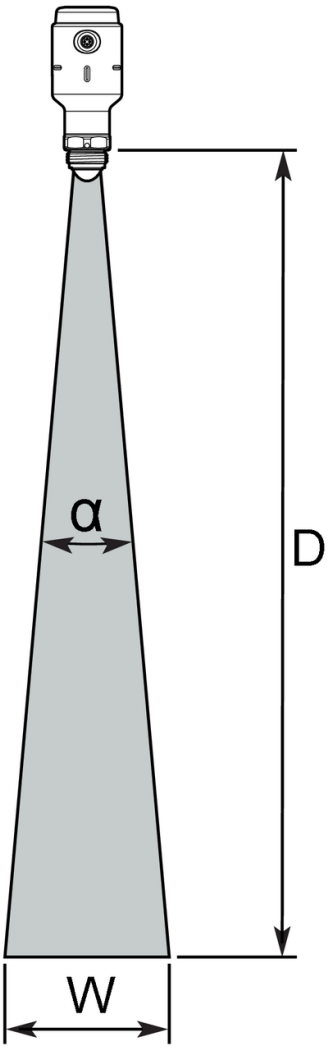


distance (D)	Beam width (W) 8° (with antenna extension) / 10° (without antenna extension)
2 m	0.3 m / 0.4 m
4 m	0.6 m / 0.7 m
6 m	0.8 m / 1.1 m
8 m	1.1 m / 1.4 m
10 m	1.4 m / 1.8 m

LW2120

Continuous level sensor

NON-CONTACT LEVEL TRANSMITTER

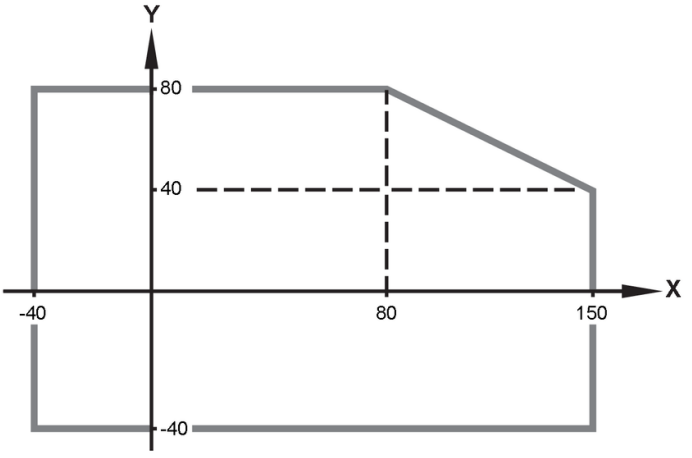


X process temperature °C

Y Ambient temperature °C

LW2120

Continuous level sensor

NON-CONTACT LEVEL TRANSMITTER

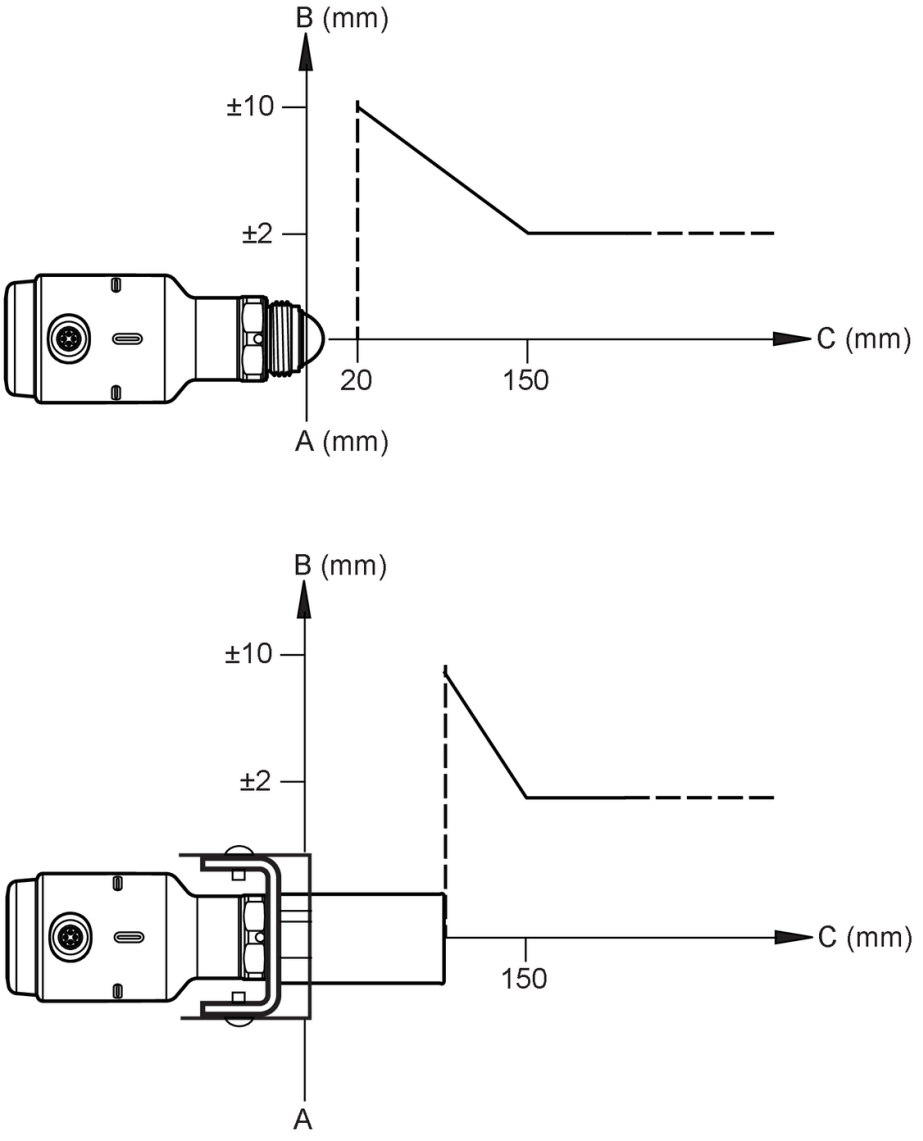

A device reference point

B accuracy

C distance